


THE NORTH LINE OF THE NE QTR. SEC. 20

THE NW CORNER OF THE NE QTR. SEC. 20

METCALF VOL. 578, PG. 341

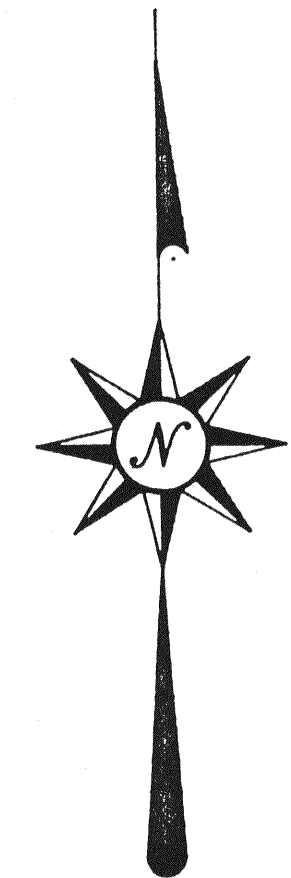

SPAYDE VOL. 910, PG. 405

1170.32'

S 01°56'55" E

THE WEST LINE OF THE NE QTR. SEC. 20

(5.72 AC.)

ALT O.R.V. 83, PG. 997

THE PLACE OF BEGINNING

REF. = 20.00'

S 82°06'29" W 477.80'

N 82°06'29" E 466.92'

REF. = 20.00'

(4.30 AC.)

N 66°01'47" W 349.13'

S 66°01'47" E 345.35'

S 88°53'00" W 116.11'

N 88°53'00" E 129.28'

8.13 AC.

S 00°56'33" E 371.53'

S 00°56'33" E 223.77'

N 01°44'34" W 657.12'

N 87°58'29" E 457.92'

TUCKER ROAD (T.H. #336)

NEW SPILT
AND RE-APPROVED
DATE: 10-2-95

- IRON PIN FOUND
- △ RR SPIKE FOUND
- ▲ RR SPIKE SET
- IRON PIN SET WITH CAP STAMPED "SEILER 6869"

BEARINGS ARE BASED ON AN ASSUMED MERIDIAN



Douglas C. Seiler 10/3/95

SURVEYED BY: DOUGLAS C. SEILER
REG. SURVEYOR #6869
52-1/2 NORTH MAIN ST.
MANSFIELD, OHIO
(419) 525-3644

ALT O.R.V. 83, PG. 997

DEARMAN VOL. 761, PG. 349

William R. ... DATE: 9-27-95
APPROVED BY MONROE TOWNSHIP ZONING INSPECTOR

SURVEY PLAT FOR	
KELLY ALT	
PT. NE QTR., SEC. 20, TWP-22, R-17	
MONROE TOWNSHIP	
RICHLAND COUNTY, OHIO	
DATE: SEPT. 15, 1995	SCALE: 1"=50'
DRWG. No: 952654	DRWN. BY: JEB