

- HIGHWAY R/W MON. FD.
- RAILROAD SPIKE SET
- IRON PIN SET - 5/8" DIA.
- REINFORCING ROD WITH PLASTIC CAP STAMPED "S.J.L. INC."

DONALD E. & PATRICIA A. REEDER  
V-476 P-196

PARCEL B  
1.144 AC.

MERLE E. & ELOUISE JARVIS  
V-352 P-420

S.R. 97 CURVE DATA  
 $\Delta = 52^{\circ} 37' 14''$  FLAD  
 $\Delta = 52^{\circ} 35' 39''$  MEAS.  
 $D_c = 35^{\circ}$   
 $R = 163.70'$   
 $T = 80.93'$   
 $L = 150.33'$   
 $E = 18.91'$

PARCEL A  
0.049 AC.

PARCEL C  
0.168 AC.

PARCEL D  
NW 1/4 SEC. 28 0.388 AC.  
NE 1/4 SEC. 29 3.721 AC.  
TOTAL = 4.109 AC.


PARCEL E  
SW 1/4 SEC. 21 0.734 AC.  
NW 1/4 SEC. 28 0.556 AC.  
NE 1/4 SEC. 29 3.721 AC.  
TOTAL = 5.011 AC.

EVELYN STRICKLING  
V-548 P-385

JOSEPHINE REEDER  
V-911 P-336

ALL BEARINGS ARE TO AN ASSUMED MERIDIAN AND ARE USED TO EXPRESS ANGLES ONLY

BEING PART OF THE SW 1/4 OF SEC. 21, THE NW 1/4 OF SEC. 28 AND THE NE 1/4 OF SEC. 29, T-21, R-17, WORTHINGTON TWP., RICHLAND CO., STATE OF OHIO.

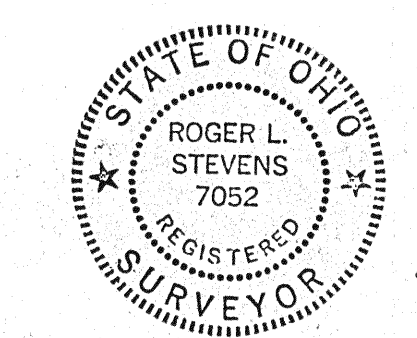

*Roger L. Stevens*  
ROGER L. STEVENS  
REG. SURVEYOR NO. 7052

SHAFFER, JOHNSTON, LICHTENWALTER & ASSOCIATES, INC.  
CONSULTING ENGINEERS - SURVEYORS  
MANSFIELD OHIO WOOSTER

SURVEY FOR  
CYRUS REEDER

DRAWN RLS	CHECKED	SCALE 1" = 50'	DATE 8-23-88
JOB NO SM 1714	SHEET 1	OF 1	

REV. 3-14-89

80.000  
3712  
76.278

20.000  
- 0.388  
19.612

277.05  
150.69  
126.12

1485.00  
- 0.6168  
3.32

50'  
495'

91.52'  
416.68'

1300'  
50° 08' 04" E

1300'  
S 59° 17' 24" E

1300'  
S 56° 06' 00" E

1300'  
S 56° 06' 00" E

1300'  
S 56° 06' 00" E

1300'  
S 56° 06' 00" E

1300'  
S 56° 06' 00" E

1300'  
S 56° 06' 00" E