


NORTH

Bearings are based on an assumed true meridian and are intended to be used for angular determination only.



VANTILBURG ROAD (TWP. HWY. 88)

The East line of the SE Qtr. of Section 18  
S 04°26'13" E 786.14'

N 70°17'01" E 682.87'

N 71°40'18" E 543.82'

N 21°50'46" W 337.26'

(PART NE QUARTER SECTION 18 16.44 ACRES)

A. BARCROFT  
O.R.V. 333, PAGE 282

FORMER MANSFIELD-SAVANNAH ROAD  
(STATE ROUTE 545)

N 21°05'46" W 477.47'

38.64 ACRES  
TOTAL

P. L. ANDERSON  
O.R.V. 521, PAGE 120

RELOCATED MANSFIELD-SAVANNAH ROAD  
(STATE ROUTE 545)

The South line of the NE Qtr. of Section 18

The Place of Beginning  
The NE corner of the SE Qtr. of Section 18

The North line of the SE Qtr. of Section 18

L. & M. MILLER  
O.R.V. 1007, P. 282

(PART SE QUARTER SECTION 18 22.20 ACRES)

M. & C. ELSON  
DEED VOLUME 660, PAGE 330

N 17°48'26" W 325.64'

N 03°27'27" E 141.29'

N 22°59'03" E 56.40'

N 73°19'57" W 132.87'

N 00°42'27" W 154.73'

N 77°31'24" W 238.00'

N 41°08'38" W 73.30'

S 04°26'13" E 1317.68'

The East line of the SE Qtr. of Section 18

L. & M. MILLER  
O.R.V. 1103 PAGE 846

BLACK FORK OF THE MOHICAN RIVER

PAVONIA NORTH ROAD (CO. HWY. 260)

WHETSTONE CREEK


M. & C. ELSON  
DEED VOLUME 660, PAGE 330

D. & M. DUNGER  
DEED VOLUME 674, PAGE 788

LINE TABLE

LINE	BEARING	DISTANCE
1-A	N 30°20'48" E	51.03'
2-B	N 80°43'43" E	63.30'
3-C	N 64°02'53" E	30.02'
4-D	N 39°14'29" E	31.08'
5-E	N 20°50'18" E	49.86'
6-F	N 33°06'12" E	44.57'
7-G	N 03°13'41" E	20.00'

- LEGEND**
- MAG NAIL SPIKE, SET
  - ▼ RAILROAD SPIKE, FOUND
  - IRON PIN, FOUND
  - ⊗ 5/8" IRON PIN WITH CAP
  - ⊗ STAMPED "SEILER 6869", SET
  - ⊗ CALCULATED POINT IN RIVER

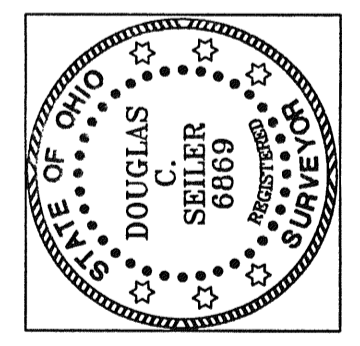

SURVEY BY:  
  
 DOUGLAS C. SEILER  
 PROFESSIONAL SURVEYOR #6869  
 52-1/2 NORTH MAIN STREET  
 MANSFIELD, OHIO 44902  
 (419) 525-3644

SURVEY PLAT  
 L. & M. MILLER  
 PT. NE & PT. SE QTRS. SEC. 18, T-24, R-17  
 WELLER TOWNSHIP  
 RICHLAND COUNTY, OHIO  
 DATE: SEPT. 25, 2002 SCALE: 1" = 100'