

H. & P. SPRANG  
V-669 P-482


NORTH

N84°00'00"E 627.00'

THE EAST LINE  
OF W. 1/2, S.W.  
1/4 SEC. 34

SURVEYED  
FOR  
TRANSFER  
5.00 AC.

H. B. & W. WINTERS  
V-648 P-365  
80 AC.

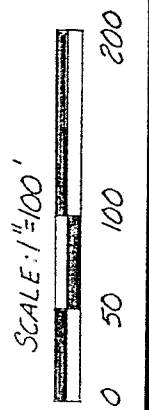

N07°01'50"W 347.42'

S01°01'50"E 347.42'

THE SOUTH LINE  
OF THE S.W. 1/4  
SECTION 34

REF. = 20.00'

REF. = 20.00'

THE S.E. CORNER  
OF THE W 1/2, SW  
1/4 SECTION 34

S84°00'00"W 627.00'

REYNOLDS RD. (T.H. 226)

R.R. SPIKE SET

R.R. SPIKE SET

THE PLACE OF  
BEGINNING

BEARING ARE BASED ON FIELD  
OBSERVATION.

*Douglas C. Seiler*  
SURVEY BY: DOUGLAS C. SEILER  
REG. SURVEYOR #6869  
5212 NORTH MAIN ST.  
MANSFIELD, OHIO  
(419) 525-3644

• 5/8" φ REINFORCING RODS  
WITH I.D. CAPS "SEILER  
#6869 SET.

SURVEY PLAT FOR PROPERTY TRANSFER	
SPRANG-TO-McGRAW	
PT. S.W. 1/4 SECTION 34, T-23, R-18 BLOOMINGGROVE TWP. RICHLAND COUNTY, OHIO	
DATE: AUG. 3, 1989	SCALE: 1"=100'
DWG. NO.: 892314	DEWN. BY: JAA