

G. A. ROMAN

0.528 AC

230'

100' 260'

THE WEST LINE OF THE NE 1/4 SEC. 18 & THE CENTER LINE OF LAVER ROAD

LAVER ROAD (TWP. HWY # 273)

N 88° 55' E 330'

89° 35'

SURVEYED FOR TRANSFER

3.09 AC

N 1° 30' W 409.3'

S 1° 30' E 407.1'

THE PLACE OF BEGINNING

S 88° 30' W 330'

G & M CATON (VOL. 543, PG. 187)

0.79 AC

330'

J. M. OUTLAW (VOL. 480, PG. 95)

330'

0.87 AC


330'

DRILLABLE IN CONG. DRIVEWAY

IRON PIN SET

THE SW CORNER OF THE NE 1/4 SECTION 18

DRILL HOLE FOUND IN CONCRETE PAVEMENT, SEC. COR.

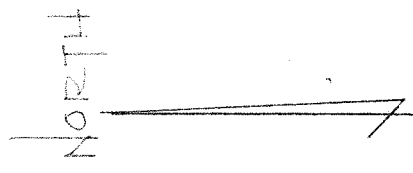

THIS SURVEY WAS MADE FOR AND AT THE REQUEST OF MR. V. G. DUDLEY.

INDICATES PROPERTY CORNERS OF THIS SURVEY. IRON PINS SET ON REAR CORNERS SPIKES SET IN E. OF ROAD

Justin A. Seiler  
SURVEYOR BY  
JUSTIN A. SEILER  
REG. 318146274421

SURVEY PLAT FOR PROPERTY TRANSFER

V. G. DUDLEY

PART NE 1/4 SECTION 18  
MIFFLIN TOWNSHIP,  
RICHLAND CO.,  
OHIO

DATE: AUG 19, 66

DRAWING NO: 68455

SCALE: 1"=100'

DRAWN BY: JPS