

Chord Bearing N87°54'W  
Chord 591.97' T = 296.11'

R = 190.43

Conrail R.R. R.O.W. 100'

PE of Track

43'

Arc 592.06'

R. Arnholt  
V. 792 P. 417

R. & J. Hulit  
V. 398 P. 198

W. & G. Harris  
V. 914 P. 300

4.781 Ac, This Survey

L. & R. Culp  
V. 720 P. 339

1.931' offset

S 1°45' W 359.9'

S 88°54' E 592.0'

N 1°45' E 349.6'



1.916.7' offset

Spikes  
South Line of SW 1/4 = E of Osburn Rd., C.H. 263

Spikes  
SE cor of SW 1/4

Bearing Basis: E. Line of SW 1/4, called  
N 1°45' E in V. 914 P. 300

- = I.P. Found
- ⊙ = I.P. Capped 5524

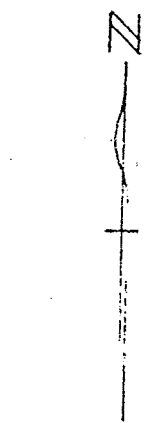

DRAWING OF SURVEY OF W. AND G. HARRIS

PART OF SW 1/4 SECTION 31  
TOWNSHIP 24 RANGE 17.  
WELLER TOWNSHIP  
RICHLAND COUNTY, OHIO

*Robert M. Little*

Robert M. Little  
Registered Surveyor # Ohio 5524  
May 11, 1989

