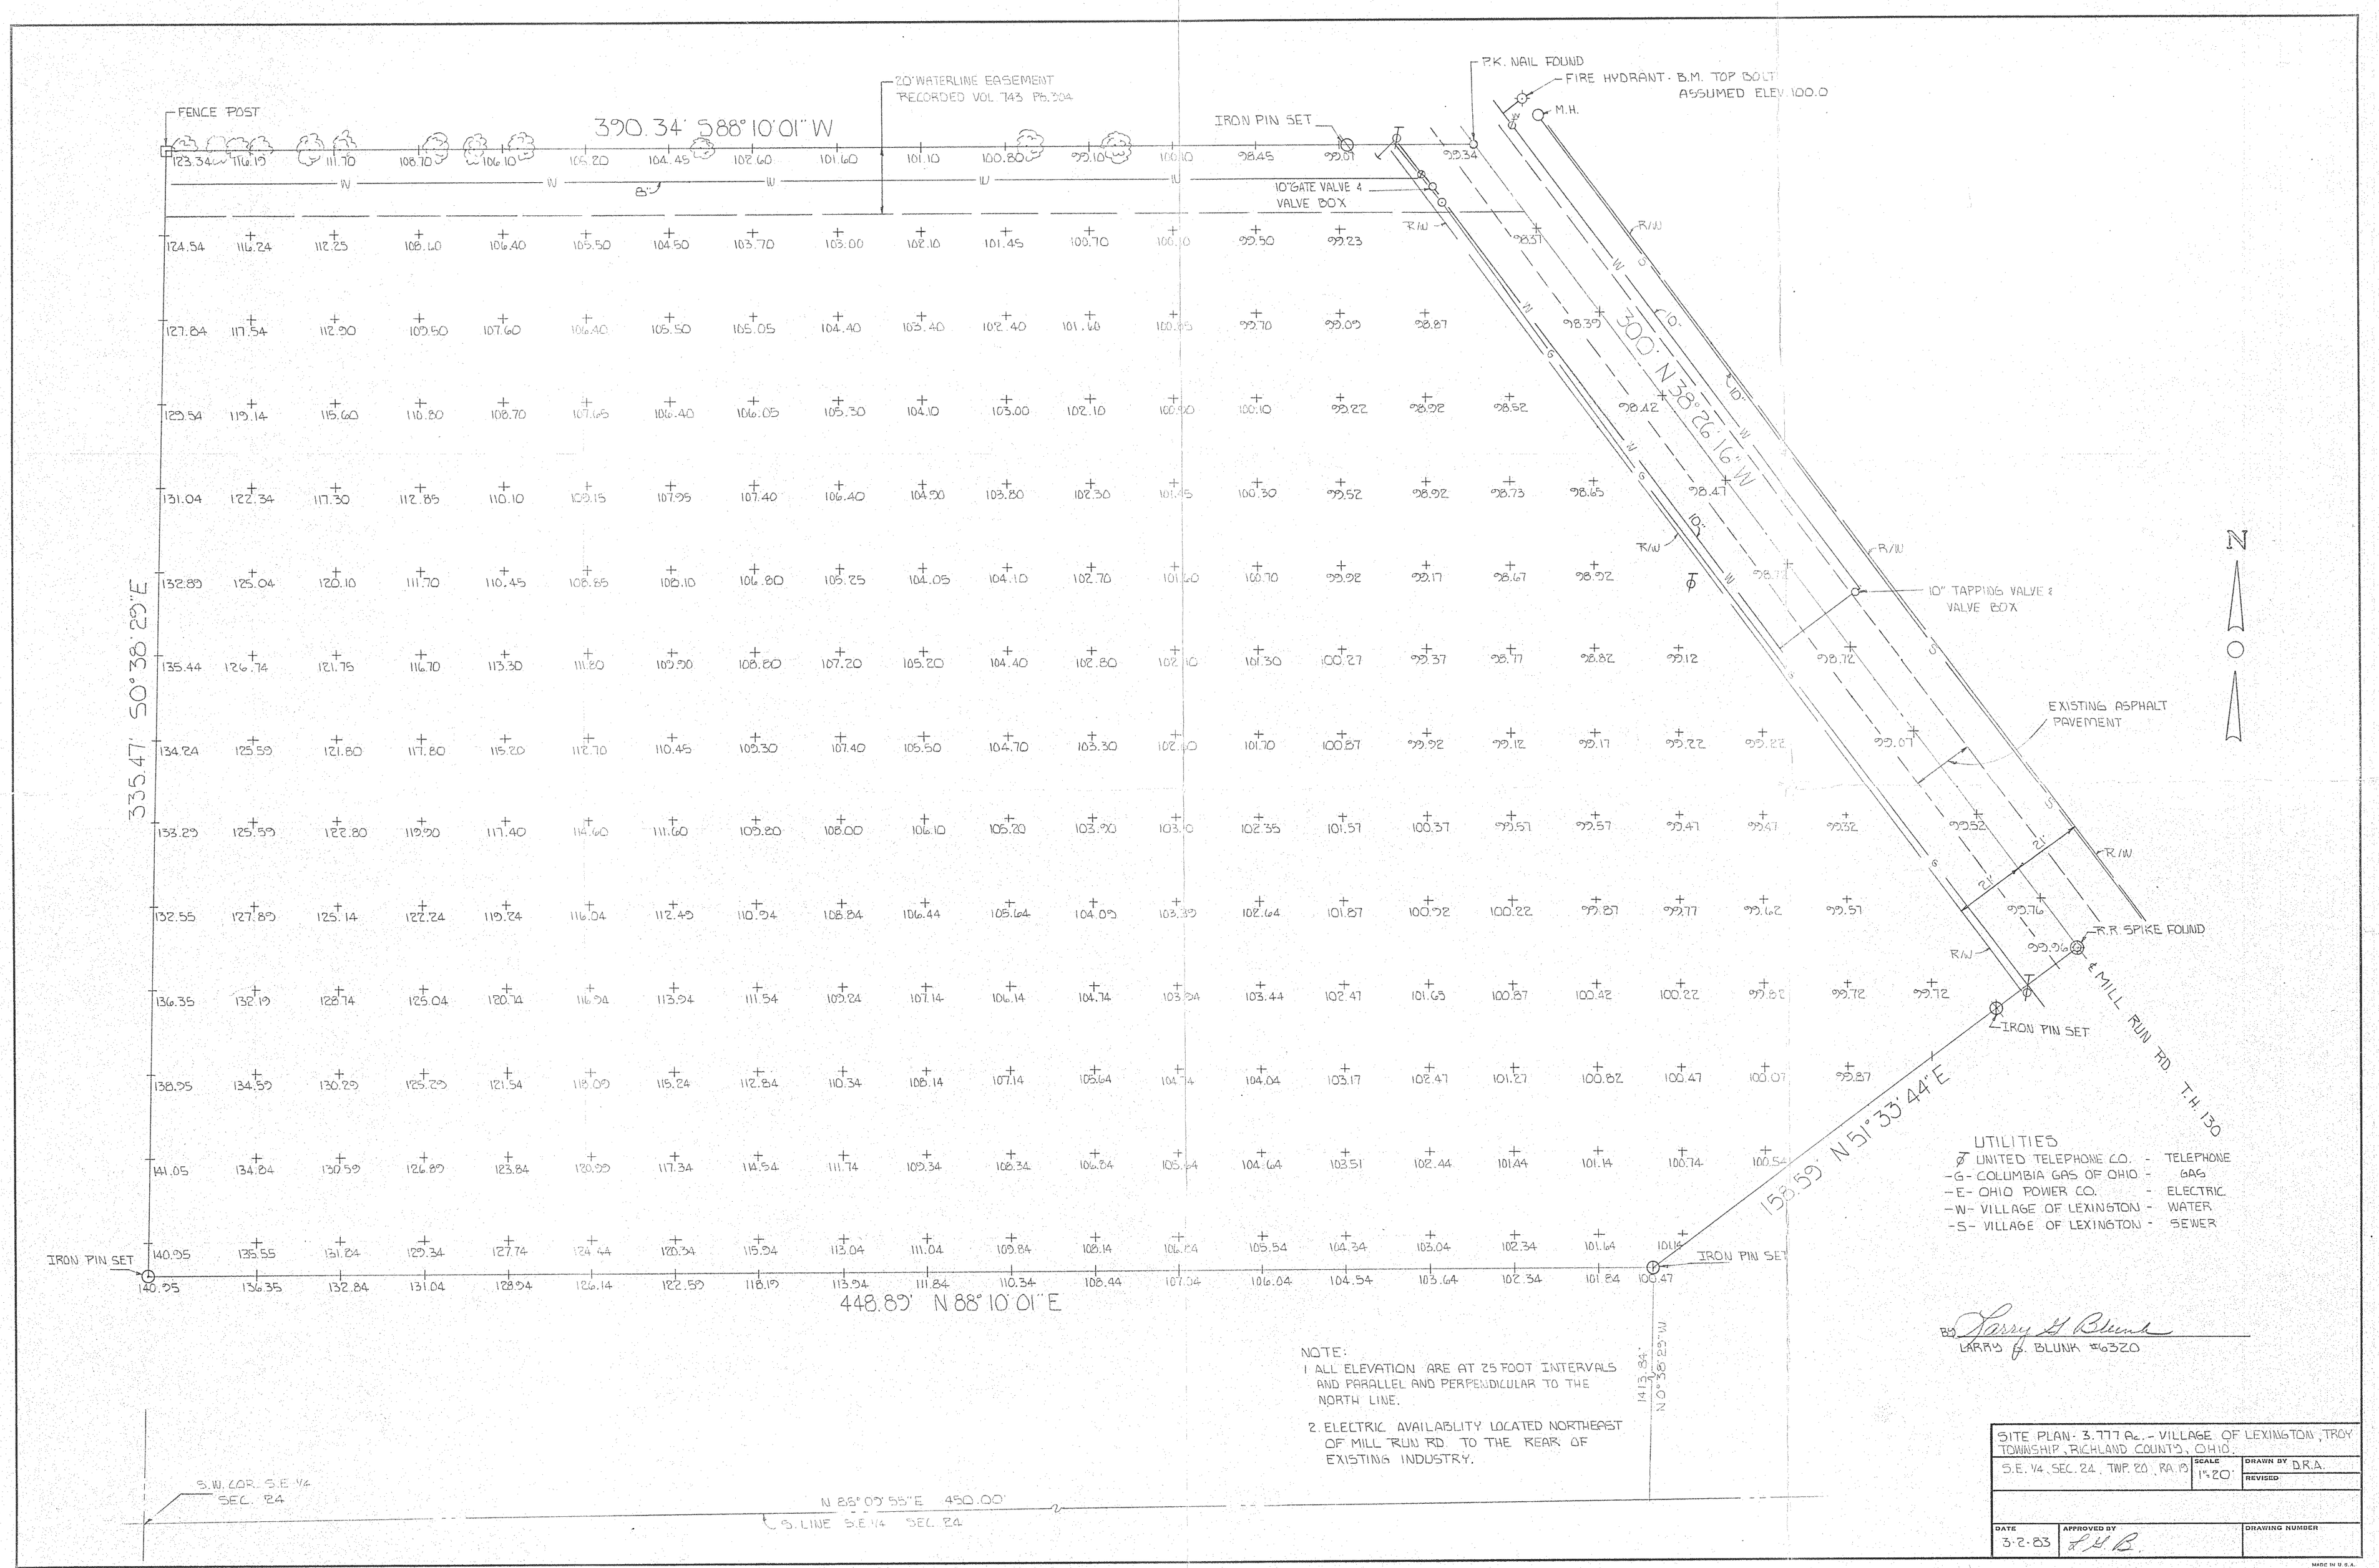
FENCE POST
390.34' S88°10'01" W
20' WATERLINE EASEMENT
RECORDED VOL 743 PG 304
IRON PIN SET
P.K. NAIL FOUND
FIRE HYDRANT · B.M. TOP BOLT
ASSUMED ELEV. 100.0
M.H.
10" GATE VALVE &
VALVE BOX
R/W
300' N38°26'16" W
10" TAPPING VALVE &
VALVE BOX
EXISTING ASPHALT
PAVEMENT
R.R. SPIKE FOUND
℄ MILL RUN RD
T.R. 130
IRON PIN SET
153.59' N51°33'44" E
335.47' S0°38'29" E
IRON PIN SET
448.89' N 88°10'01" E
IRON PIN SET
N
UTILITIES
UNITED TELEPHONE CO. - TELEPHONE
-G- COLUMBIA GAS OF OHIO - GAS
-E- OHIO POWER CO. - ELECTRIC
-W- VILLAGE OF LEXINGTON - WATER
-S- VILLAGE OF LEXINGTON - SEWER
BY Larry G. Blunk
LARRY G. BLUNK #6320
NOTE:
1 ALL ELEVATION ARE AT 25 FOOT INTERVALS AND PARALLEL AND PERPENDICULAR TO THE NORTH LINE.
2. ELECTRIC AVAILABLITY LOCATED NORTHEAST OF MILL RUN RD. TO THE REAR OF EXISTING INDUSTRY.
1413.84' N0°38'29" W
S.W. COR. S.E. 1/4 SEC. 24
N 88°09'55" E 450.00'
℄ S. LINE S.E. 1/4 SEC. 24
SITE PLAN: 3.777 Ac. - VILLAGE OF LEXINGTON, TROY TOWNSHIP, RICHLAND COUNTY, OHIO.
S.E. 1/4 SEC. 24, TWP. 20, RA. 13
SCALE 1"=20'
DRAWN BY D.R.A.
REVISED
DATE 3-2-83
APPROVED BY L.G.B.
DRAWING NUMBER
MADE IN U.S.A.